




**SCP PART#: 12/2SP-DB**

Direct Burial Speaker Cable- 2C/12AWG 65 Strand Oxygen Free Copper, Gel Filled, LLDPE Jkt- Black - 1000ft/305m Spool

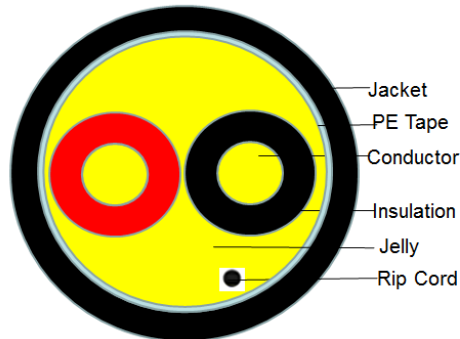

**Regulatory**

EU RoHS 2011/65/EU Compliant

**Application:** Speaker Cable

**Construction Characteristics:**

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 2C(2.11mm <sup>2</sup> )
	Construction	65/0.250mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.10mm
	Colors	Black & Red
Filler	Jelly	Gel Filled
Screen	Wrap	PE Tape
Jacket	Material	LLDPE
	Min.Thickness	0.70mm
	AVG.Thickness	0.80mm
	Diameter	8.3mm +/-0.20mm
	Rip Cord	Nylon
	Color	Black
Bend radius	Min 15D/96mm	

**Electrical & Physical Characteristics:**

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 9.2ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage - Insulated/Operating	Max 300V / 80V - 100V

**Marking:**

STRUCTURED CABLE PRODUCTS --- 12/2SP-DB --- 2C 12AWG 65 STRAND OFC GEL FILL SPEAKER CABLE - OUTDOOR/DIRECT BURIAL UV SUN RES LLDPE JKT - EU RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*M

**Packaging:**

Approx.Wight(kg)	Approx.Dimension(mm)	Package	Packages per pallet
33.2kg	360x300x160	305M/spool	27