

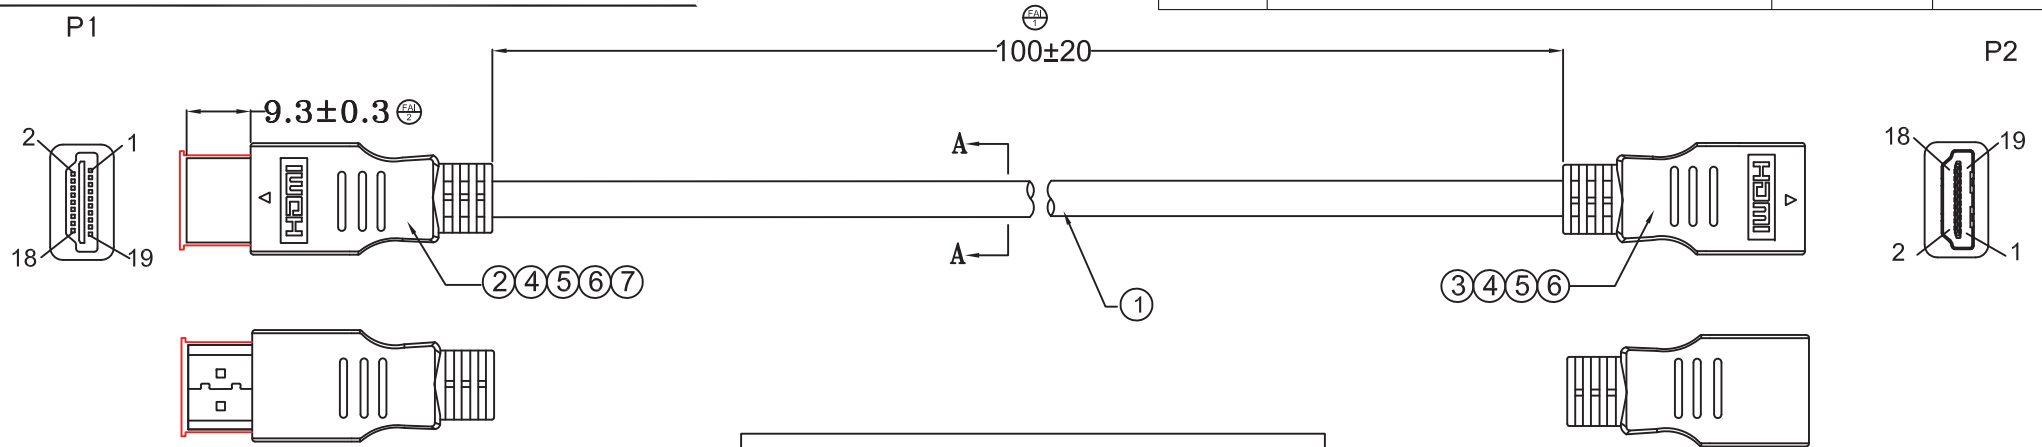


REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE		

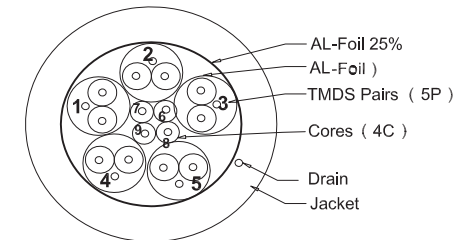

PIN OUT

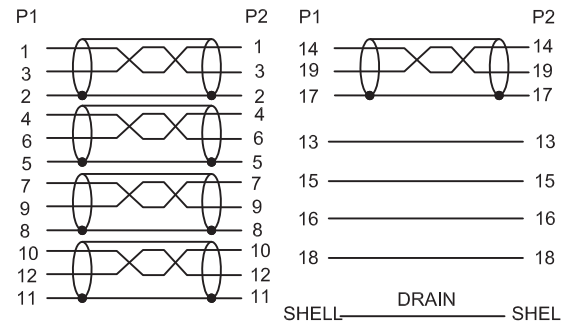

CABLE CONSTRUCTION

NOTES:

- Electrical Requirements:
 - The cable ass'y must be 100% tested open, short, miswiring.
 - Conductor Resistance: 3.0 Ohms Max.
 - Insulation Resistance: 10M Ohms/300V DC/10ms.
- All Applicable Materials Must Be RoHS.
- Dimensions Marked "EAL" "Need to Be Checked By QC."
- Dimensions Marked "CPK" "Need to Be Calculated Cp/Cpk, Cpk≥1.33."

7	DUST COVER	PE COVER
6	OVER MOLD	PVC 70P COLOR:BLACK
5	INNER MOLD	HD-PE
4	WIRE TANK	HDMI WIRE TANK 30AWG
3	CONN	HDMI A TYPE FEMALE, PIN G/F, NICKEL SHELL, INSULATION BLACK
2	CONN	HDMI A TYPE MALE, PIN G/F, NICKEL SHELL, INSULATION BLACK
1	CABLE	UL20276 ((1/0.20BC)*1P+E+AM)*5P+1P*(1/0.20BC)+4C*(1/0.20BC)+AL+D(1/0.20BC) OD5.5±0.3mm COLOR:BLACK
NO.	ITEM	DESCRIPTION

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

SimplyAV™			
ERP NO.:	DO-D004	SAMPLE DWG NO.:	
DOC No.:		REVISION	A/1
CUSTOMER:		UNIT	mm
CUSTOMER P/N:	HDMI PORT SAVER	SCALE	1 : 1
DESCRIPTION	2H01AB(HDMI AM TO AF L=100MM CABLE	PAGE NO	1/1
APPROVAL		DATE	2019-8-16
CHECKED			