
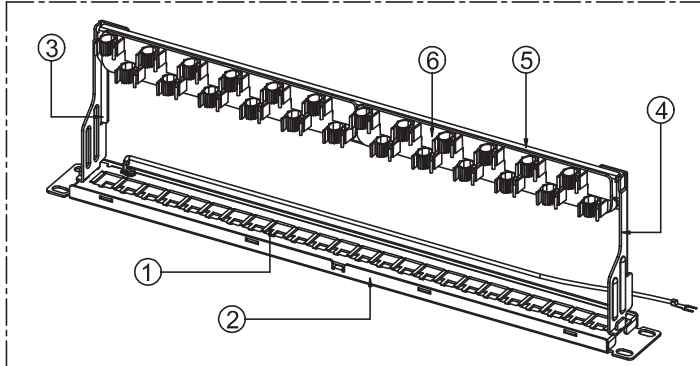
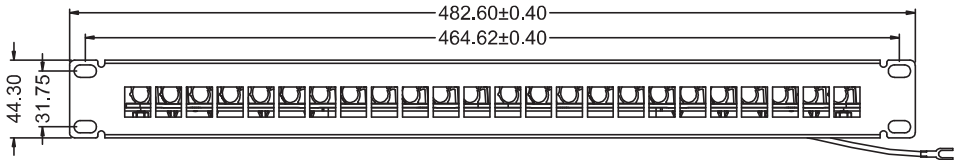

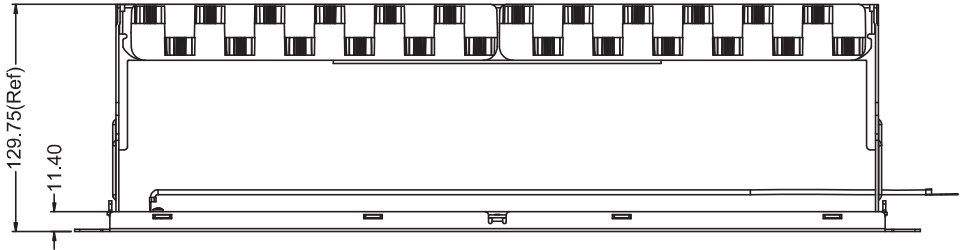

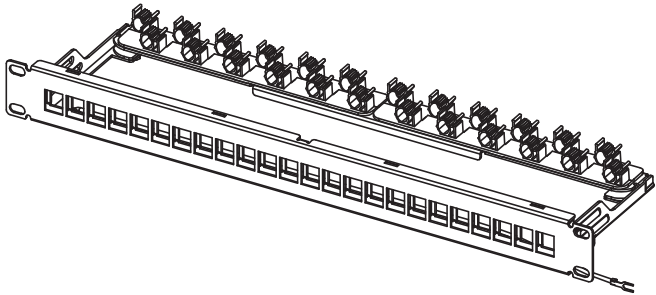


DEGREE CLASS	A	B	C	✓ D
LIMITS				
<10	±0.02	±0.05	±0.10	±0.15
10~50	±0.05	±0.10	±0.15	±0.20
50~120	±0.10	±0.15	±0.20	±0.25
120~300	±0.15	±0.20	±0.25	±0.30
300~500	±0.20	±0.25	±0.30	±0.35
500~1000	±0.25	±0.30	±0.35	±0.40
1000~1500	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°



MECHANICAL:

Operating Temperature:-10°C to +60°C

Storage Temperature:-40°C to +70°C

MATERIAL:

(1):SPCC;Zinc Plated

(2):SPCC;Black Powder Coated

(3):SPCC;Black Powder Coated

(4):SPCC;Black Powder Coated

(5):SPCC;Black Powder Coated

(6):PA66

MODEL:	TITLE:		Simply45[®]			
S45-2024SU			Multimedia patch panel 24-port			
DRAWN:	PART NO.			UNIT	MM	
DESIGNED:	MATERIAL	Please see the details at left		SCALE	1 : 1	
CHECKED:	FINISH	Please see the details at left		SHEET	1 OF 1	
	TOOLING NO.			SIZE	A4	REV. A
APPROVED:	DWG NO.	SB SimplyBRANDS[™]				