
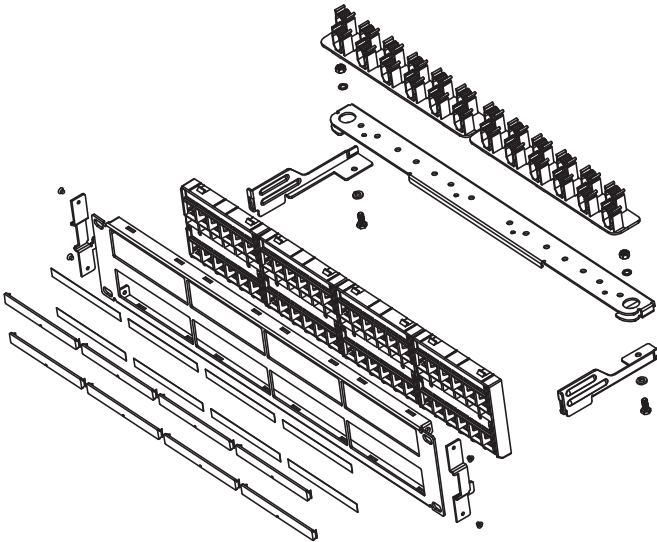
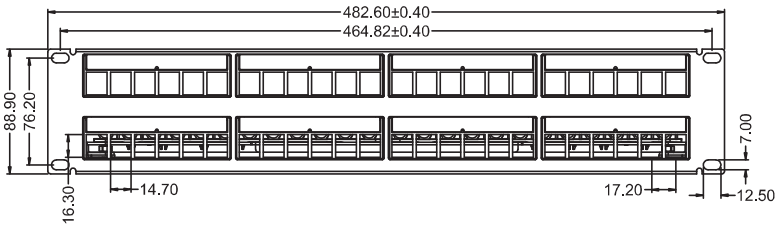

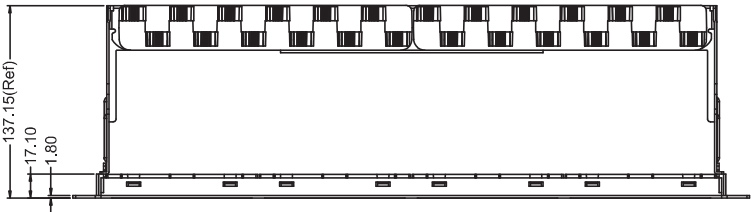

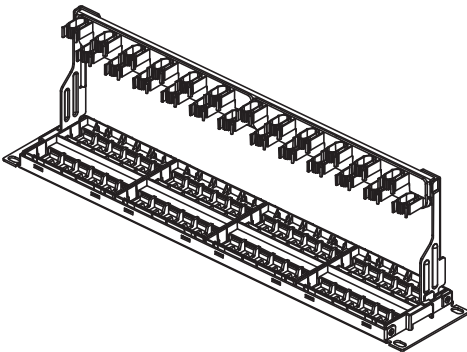


LIMITS	DEGREE CLASS			
	A	B	C	D
<10	±0.02	±0.05	±0.10	±0.15
10~50	±0.05	±0.10	±0.15	±0.20
50~120	±0.10	±0.15	±0.20	±0.25
120~300	±0.15	±0.20	±0.25	±0.30
300~500	±0.20	±0.25	±0.30	±0.35
500~1000	±0.25	±0.30	±0.35	±0.40
1000~1500	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°

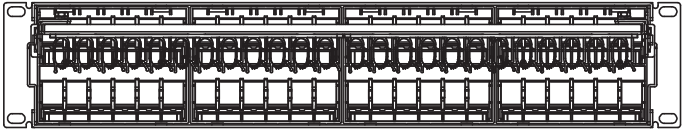

MECHANICAL:

Supporting Cable Diameter: 6~9mm

Operating Temperature:-10°C to +60°C

Storage Temperature:-40°C to +70°C

MATERIAL:

Front cover: ABS+PC

Blacket : SPCC

MODEL: S45-2048U		TITLE: Multimedia patch panel 48-port		Simply45®					
DRAWN:		PART NO.				UNIT		MM	
DESIGNED:		MATERIAL	Please see the details at left			SCALE		1 : 1	
CHECKED:		FINISH	Please see the details at left			SHEET		1 OF 1	
		TOOLING NO.				SIZE	A4	REV.	A
APPROVED:		DWG NO.	 SimplyBRANDS™					