


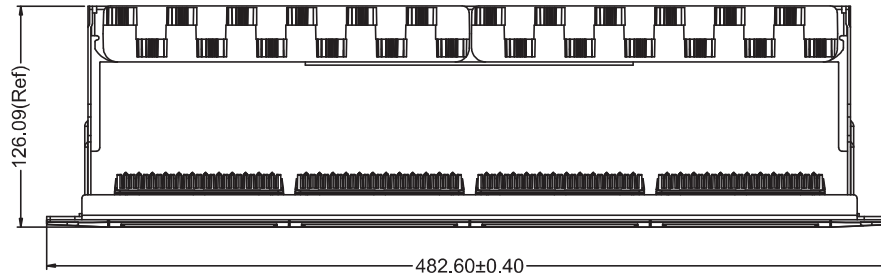

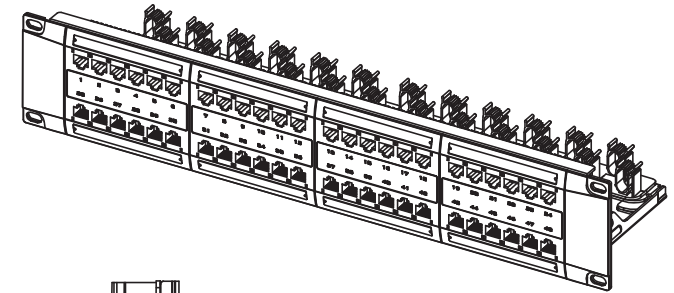




DEGREE CLASS	A	B	C	✓ D
LIMITS				
<10	±0.02	±0.05	±0.10	±0.15
10~50	±0.05	±0.10	±0.15	±0.20
50~120	±0.10	±0.15	±0.20	±0.25
120~300	±0.15	±0.20	±0.25	±0.30
300~500	±0.20	±0.25	±0.30	±0.35
500~1000	±0.25	±0.30	±0.35	±0.40
1000~1500	±0.30	±0.35	±0.40	±0.45
ANGEL	±0.2°	±0.5°	±1.0°	±1.5°

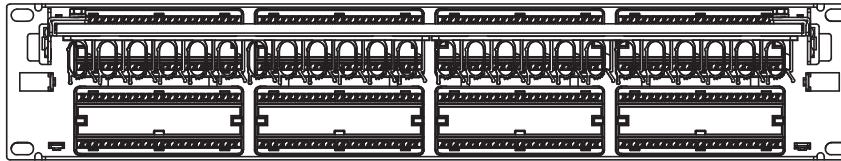

Mechanical Screw



Accessory Kit

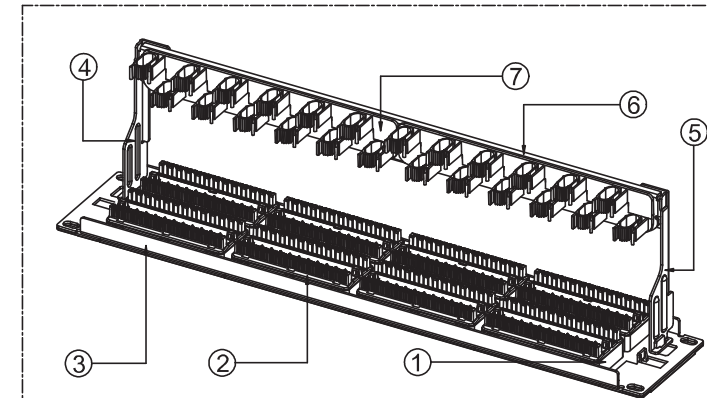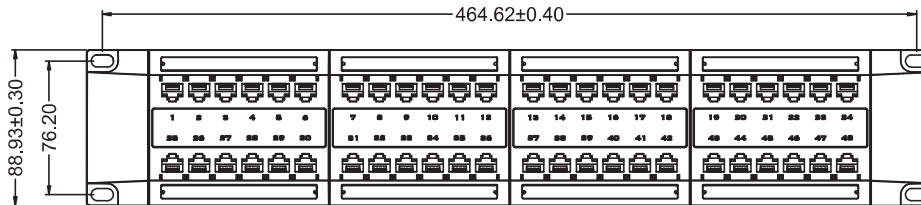

ELECTRICAL:

- CURRENT RATING : 1.5A
- DIELECTRIC WITHSTANDING VOLTAGE : 1000VAC 60Hz
- INSULATION RESISTANCE : 500 MΩ MIN.
- CONTACT RESISTANCE : 20 mΩ MAX.

MECHANICAL:

- Operating Temperature:-10°C to +60°C
- Storage Temperature:-40°C to +70°C

MATERIAL:

- (1):ABS+PC
- (2):ABS+PC
- (3):SPCC;Black Powder Coated
- (4):SPCC;Black Powder Coated
- (5):SPCC;Black Powder Coated
- (6):SPCC;Black Powder Coated
- (7):PA66

MODEL: S45-2648		TITLE: Patch panel, pcb type 48-port		Simply45[®]	
DRAWN:	PART NO.	UNIT		MM	
DESIGNED:	MATERIAL	Please see the details at left		SCALE	1 : 1
CHECKED:	FINISH	Please see the details at left		SHEET	1 OF 1
	TOOLING NO.	SIZE		A4	REV. A
APPROVED:		SimplyBRANDS[™]			