

Speaker Cables

PRO SERIES

Featuring Tinned Copper Conductors



UL
Rated



Indoor/Outdoor
UV Resistant




High Strand
Count OFC



Tinned Copper
Oxidation Resistant

Outdoor installations can make copper speaker cables susceptible to oxidation and corrosion that negatively affects cable performance by increasing resistance and reducing conductivity. Our new tinned copper ProSeries Speaker Cables resist oxidation and maintain performance quality over the lifespan of the cable.

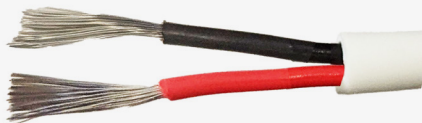

Tinned Copper Conductors

Prevents oxidation & corrosion. Maintains performance & extend lifespan of the cable.



Oxidized Copper Conductor



Lowers cable performance by increasing resistance and reducing conductivity.

PRO SERIES

INDOOR/OUTDOOR with HD PVC JACKET

Features:

- High Strand Count Tinned Copper
- UV Sun Resistant HD PVC Jacket
- UL CMR
- EN50575 Dca EuroClass Rated



Part Numbers:

16/40FCTC-HD-BKD / 16/20FCTC-HD-WTD

4C/16AWG TC 65-Strand OFC Indoor/Outdoor HD Jkt, Black or White - 500ft/152m Reel or II Box

16/20FCTC-HD-BKD / 16/20FCTC-HD-WTD

2C/16AWG TC 65-Strand OFC Indoor/Outdoor HD Jkt, Black or White - 500ft/152m Reel or II Box

14/40FCTC-HD-BKD / 14/40FCTC-HD-WTD

4C/14AWG TC 105-Strand OFC Indoor/Outdoor HD Jkt, Black or White - 500ft/152m Reel in Box

14/20FCTC-HD-BKD / 14/20FCTC-HD-WTD

2C/14AWG TC 105-Strand OFC Indoor/Outdoor HD Jkt, Black or White - 500ft/152m Reel or II Box

14/20FCTC-HD-WTD-1000

2C/14AWG TC 105-Strand OFC Indoor/Outdoor HD Jkt, White - 1000ft/305m Spool

12/20FCTC-HD-WTD / 12/20FCTC-HD-WTD

2C/12AWG TC 65-Strand OFC Indoor/Outdoor HD Jkt, White - 500ft/152m Reel in Box

PRO SERIES

DIRECT BURIAL/OUTDOOR with LLDPE JACKET

Features:

- High Strand Count Tinned Copper
- LLDPE Jacket for Superior Puncture Resistance
- Cold Temperature Flexibility
- UV Sun Resistant / Rodent Resistant
- Gel Filled Weatherproof Construction



Part Numbers:

14/2SPTC-DB-152M

2C/14AWG TC 105-Strand OFC Gel Filled LLDPE Jkt, Black - 500ft/152m Spool

14/2SPTC-DB-100M

2C/14AWG TC 105-Strand OFC Gel Filled LLDPE Jkt, Black - 328ft/100m Reel in Box

14/4SPTC-DB-100M

4C/14AWG TC 105-Strand OFC Gel Filled LLDPE Jkt, Black - 328ft/100m Spool

14/4SPTC-DB-152M

4C/14AWG TC 105-Strand OFC Gel Filled LLDPE Jkt, Black - 500ft/152m Spool

12/2SPTC-DB-500

2C/12AWG TC 65-Strand OFC Gel Filled LLDPE Jkt, Black - 500ft/152m Spool

