
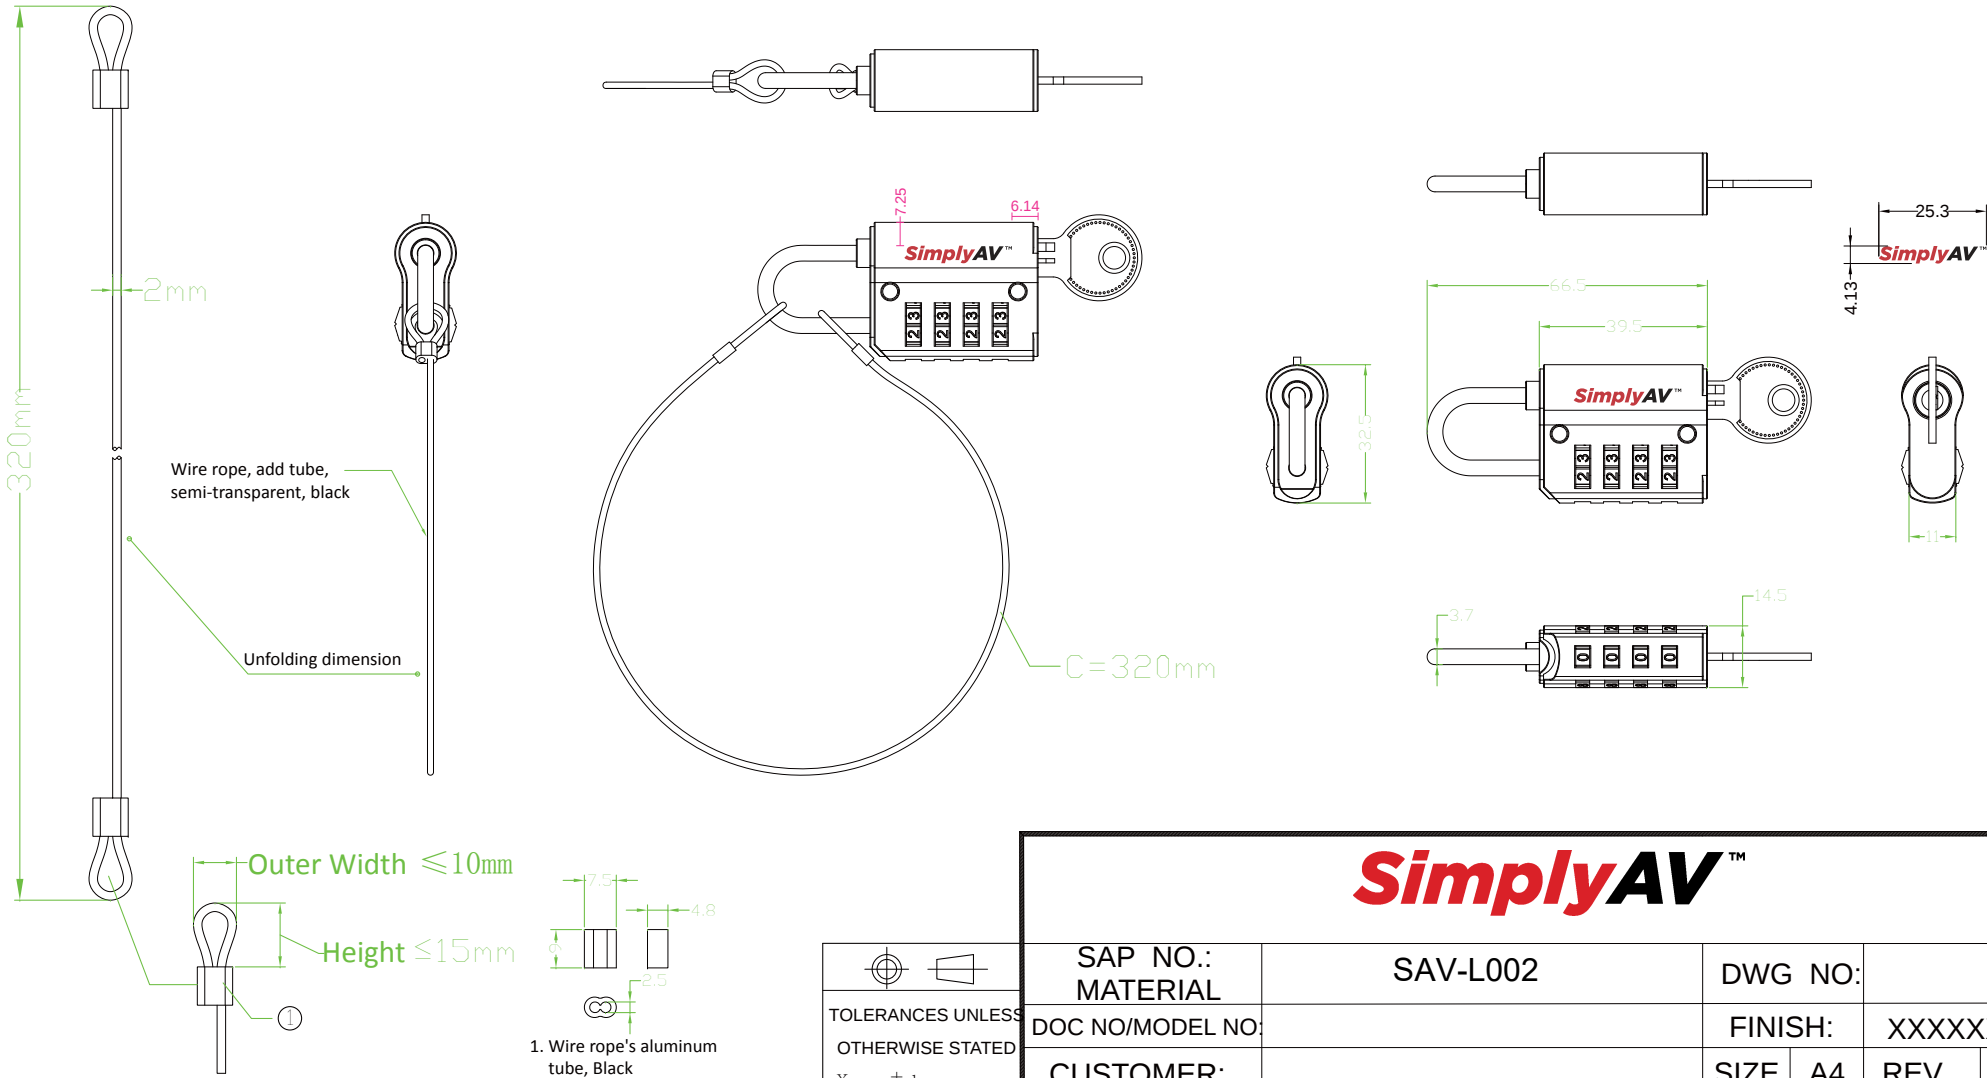



REV.	REVISED DESCRIPTION	DATE	CHECKED
1.0	DESIGN		



SimplyAV™

 TOLERANCES UNLESS OTHERWISE STATED X. = ± 1 X.X = ± 0.2 X.XX = ± 0.1 TOOLING DECIMALS ANGLES X. ±0.3 ±1° X.X ±0.2 ±0.5° X.XX ±0.1 ±0.5°	SAP NO.: MATERIAL		SAV-L002		DWG NO:				
	DOC NO/MODEL NO:					FINISH:		XXXXXX	
	CUSTOMER:					SIZE	A4	REV	1.0
	CUSTOMER P/N:					UNIT	mm	SCALE	1 : 1
	DESCRIPTION PRODUCT			SK102 (C:320MM)		PAGE NO			
APPROVAL			CHECKED		DATE		2024/1/20		
									

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE		

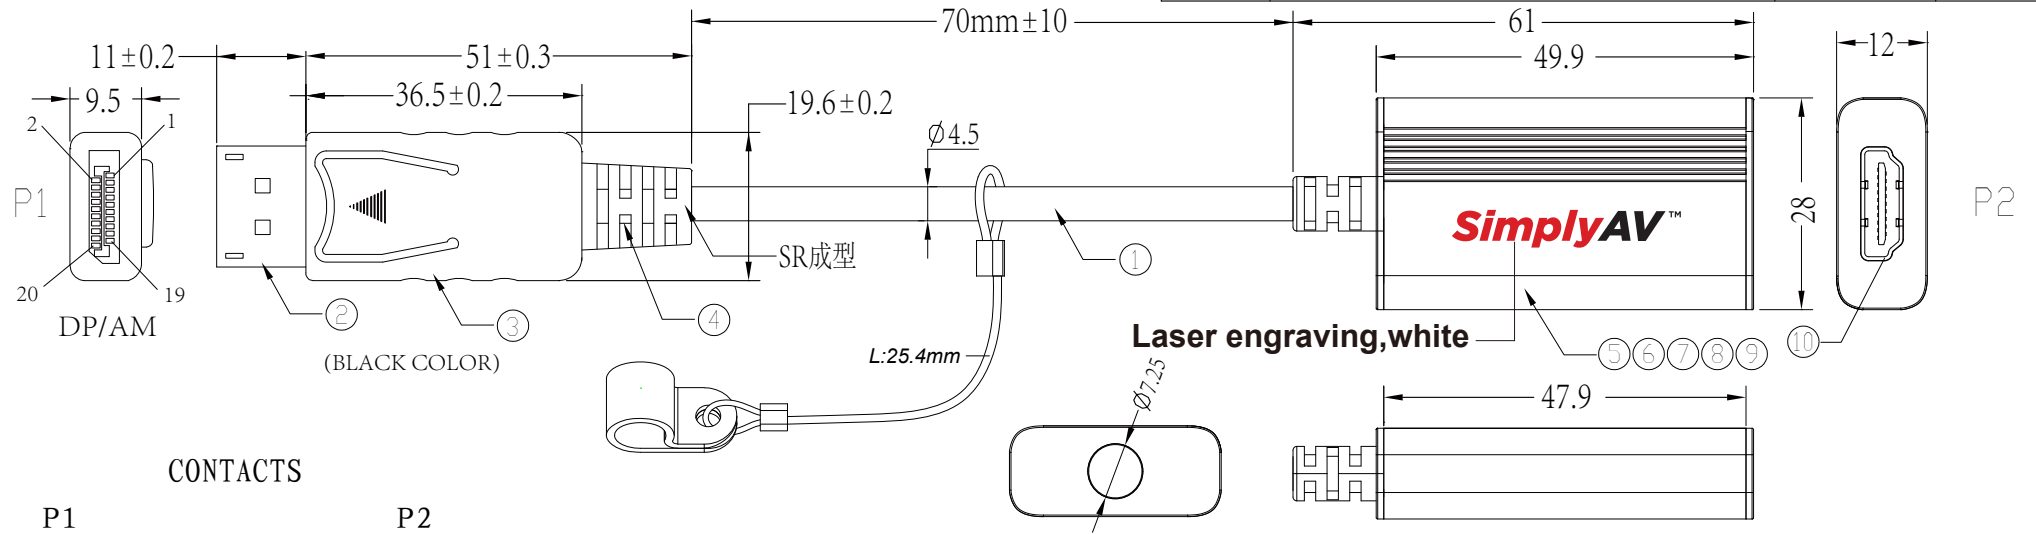

CONTACTS

P1		P2	
RD 1		1 RD	
WH 3		3 WH	
GND 2		2 GND	
BN 4		4 BN	
WH 6		6 WH	
GND 5		5 GND	
GN 7		7 GN	
WH 9		9 WH	
GND 8		8 GND	
BU 10		10 BU	
WH 12		12 WH	
GND 11		11 GND	
GN 13		13 GN	
WH 14		14 WH	
BK 15		15 BK	
WH 16		16 WH	
GND 17		17 GND	
RD 18		18 RD	
YE 19		19 YE	
Shell		Shell	

Note:

1. Cable: (1/0.16T*1P+1C+AL+MY)*5C+1/0.16T*5C+ADB16/6/0.12AL, OD 4.5±0.1mm, Black
2. DP20P male*1PCS, Gold-plated PIN, Plastic core with Nickel-plated metal
3. DP Enclosure: ABS, Black
4. SR, PVC 45°
5. Aluminum Enclosure, 47.9mm*12mm*28mm
6. ABS Frontal plate
7. ABS Back plate
8. SR, PVC 45°
9. PCBA, 1.6MM thickness
10. HDMI A/M*1PCS, 1.6MM thickness splint-type, Gold-plated PIN, Nickel-plated metal


Test machine test condition.

- 100% OPEN, SHORT & INTERMITTANCE TEST.
- CONDUCTOR RESISTANCE: 3ohms MAX:
- INSULATION RESISTANCE: 5M Min/, 10ms:
- HDMI 8K@60Hz

TOLERANCES UNLESS OTHERWISE STATED	
.X	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

SimplyAV™			
ERP NO.:	SAV-L002	SAMPLE DWG NO.:	
DOC No.:		REVISION	A/1
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	1 : 1
DESCRIPTION	SAV-D001 8K DP		PAGE NO 1/1
APPROVAL		CHECKED	DATE 2022-11-7
SimplyAV™			

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE		

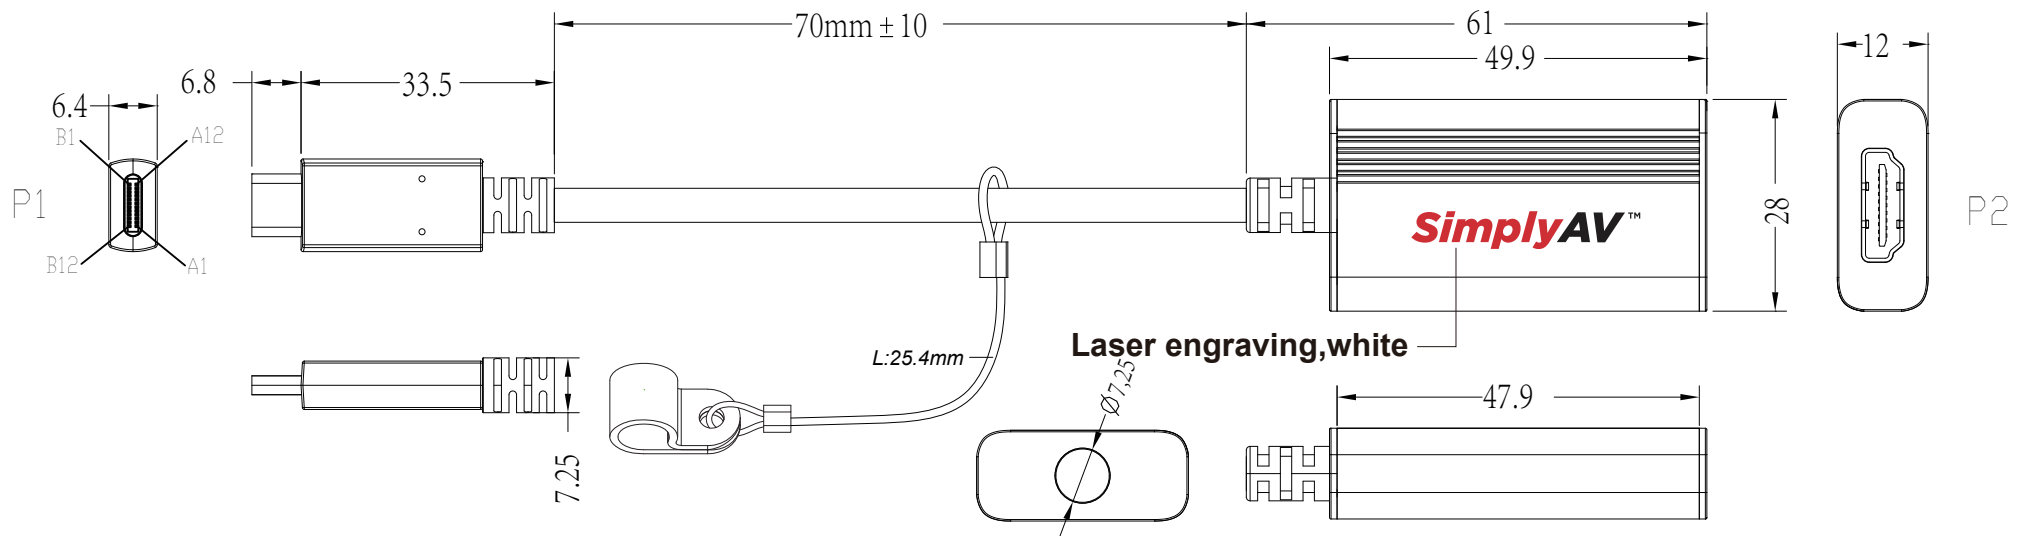

WIRE TABLE

P1	P2
B10	Blue
B11	Yellow
A2	Brown
A3	White
A10	Purple
A11	Orange
B2	Red
B3	White
A1B1.A12B12	Black
A6	Green
A7	White
B5	Yellow
A4.A9.B4.B9	Red
A5	Blue
A8	Pink
B8	Purple
Shell	

Specification:

Cable: UL2725 (34AWG*1P+D+AL+MYLAR)*4C+34AWG*1P
+34AWG*4C +26AWG*2C+AL+B Colour: Black, OD: 4.5MM

Input: USB3.1 Type-C/M, Nickel Plated, Integrated Type.

Output: HDMI Maximum Resolution: 7680*4320@60Hz,
Nickel Plated.

Housing Colour and Material: Black, Aluminum.

Front and Backward Housing: Matte Black, ABS.

Operating system: Supports Windos 10, Mac,
Chrome OS and Android Operating System.

Laser engraving, white

SimplyAV™

ERP NO.:

SAV-L002

SAMPLE
DWG NO:

DOC No.:

REVISION

A/1

CUSTOMER:

UNIT

mm

CUSTOMER P/N:

SCALE

1 : 1

DESCRIPTION

SAV-D003 8K USB C

PAGE NO

1/1

DATE

2022-11-7

APPROVAL



CHECKED

SB SimplyBRANDS™


ITEM SPECIFICATION

	TOLERANCES UNLESS OTHERWISE STATED
X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1


REV.	REVISED DESCRIPTION	DATE	CHECKED
1.0	DESIGN	2022/12/2	

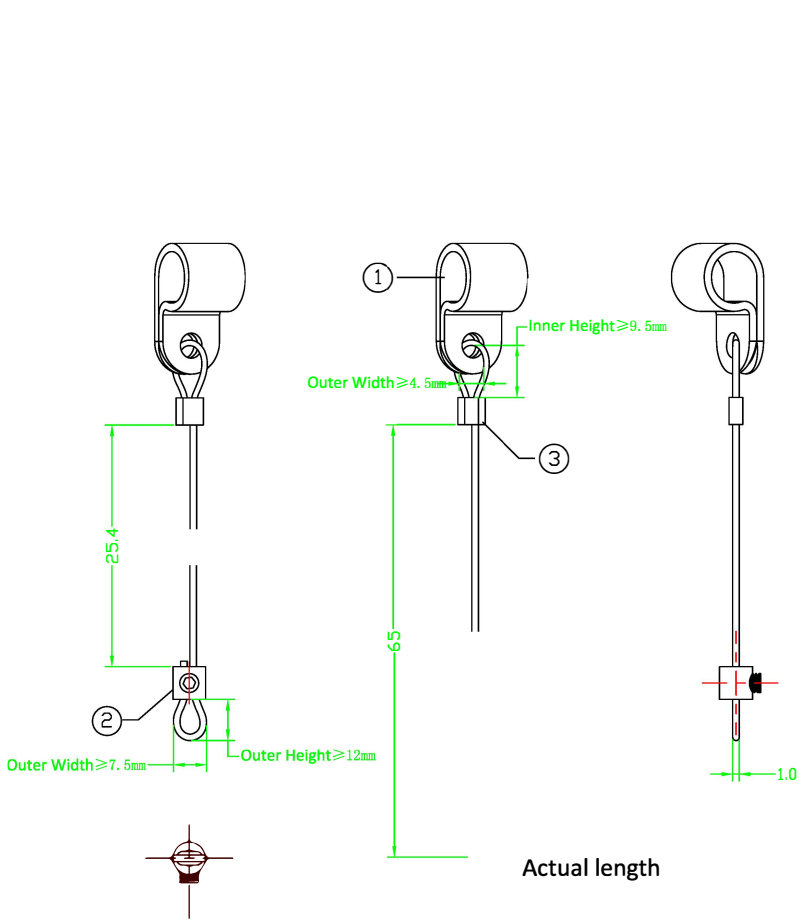


1. R Type Nylon Holder, black

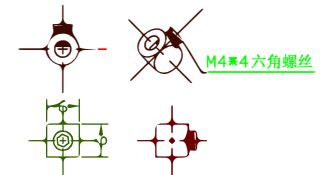


2. Hexagon screw, Black



3. Wire rope's aluminum tube, Black

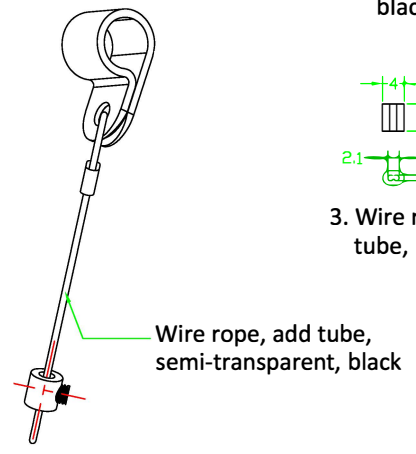

Wire rope, add tube, semi-transparent, black

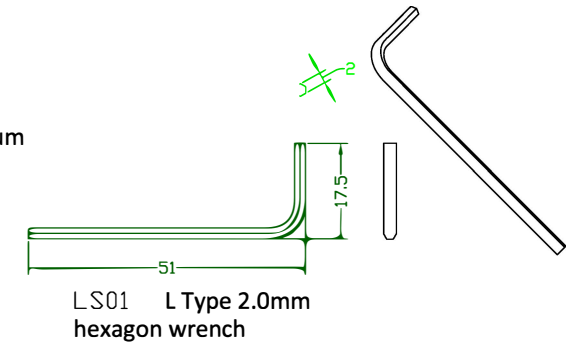



SimplyAV™

TOLERANCES UNLESS OTHERWISE STATED	
X. = ± 1	
X.X = ± 0.2	
X.XX = ± 0.1	
TOOLING DECIMALS ANGLES	
X. ±0.3 ± 1°	
X.X ±0.2 ± 0.5°	
X.XX ±0.1 ± 0.5°	


SAP NO.: MATERIAL	SAV-L002	DWG NO:	
DOC NO/MODEL NO:	XXXXX	FINISH:	XXXXXX
CUSTOMER:		SIZE	A4
CUSTOMER P/N:		REV	1.0
DESCRIPTION	(L:25.4MM)	UNIT	mm
PRODUCT		SCALE	1 : 1
APPROVAL	CHECKED	PAGE NO	
		DATE	2022/12/2
			SB SimplyBRANDS™

ITEM	SPECIFICATION
------	---------------


REV.	REVISED DESCRIPTION	DATE	CHECKED
1.0	DESIGN	2019/08/23	

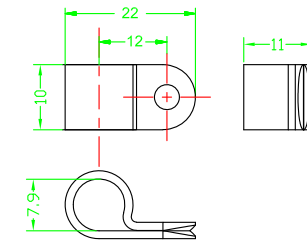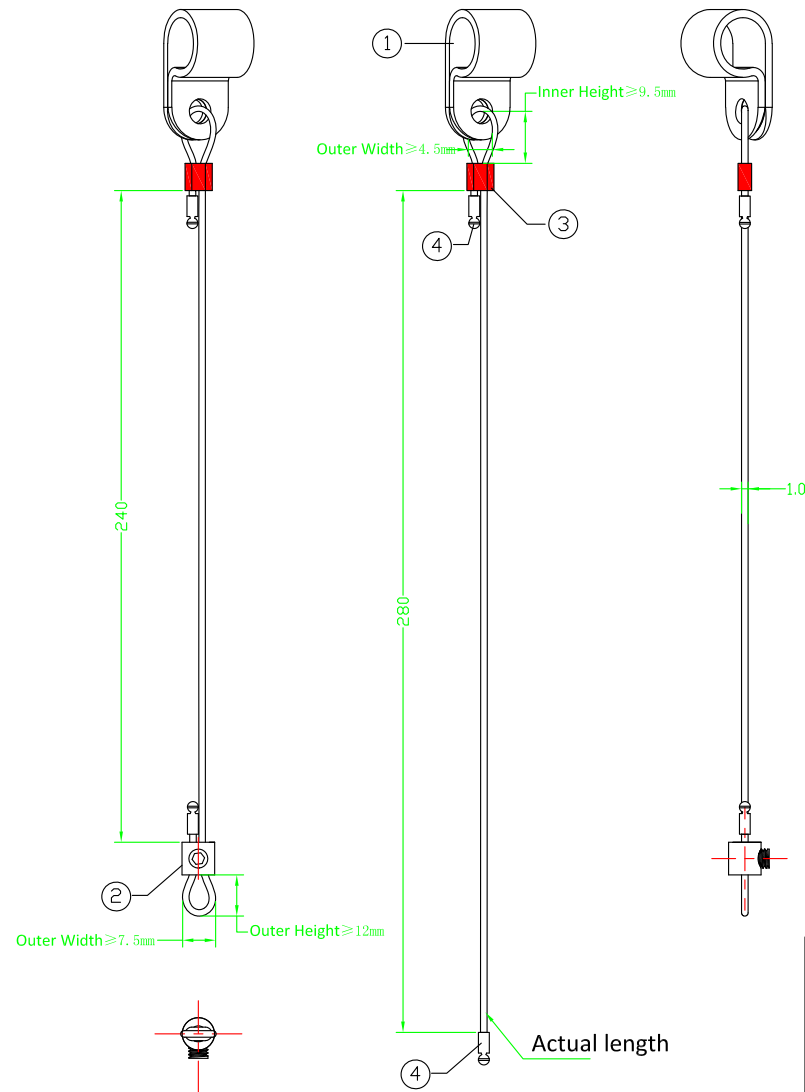


1. R Type Nylon Holder, black

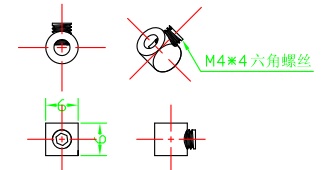

2. Hexagon screw, Black



3. Wire rope's aluminum tube, red



4. Copper tube, Black

Wire rope, add tube, semi-transparent, black

SimplyAV™

TOLERANCES UNLESS OTHERWISE STATED
X. = ± 1
X.X = ± 0.2
X.XX = ± 0.1
TOOLING DECIMALS ANGLES
X. ±0.3 ± 1°
X.X ±0.2 ± 0.5°
X.XX ±0.1 ± 0.5°

SAP NO.: MATERIAL	SAV-L002	DWG NO:	
DOC NO/MODEL NO:		FINISH:	XXXXXX
CUSTOMER:		SIZE	A4
CUSTOMER P/N:	HDMI CABLE HARNESS	REV	1.0
DESCRIPTION PRODUCT	U240 (L:240MM)	UNIT	mm
APPROVAL	CHECKED	PAGE NO	1 : 1
		DATE	2019/08/23
			SB SimplyBRANDS™

ITEM	SPECIFICATION
------	---------------